


CNC Spindle Slide  
Precision Lathe

# XD series

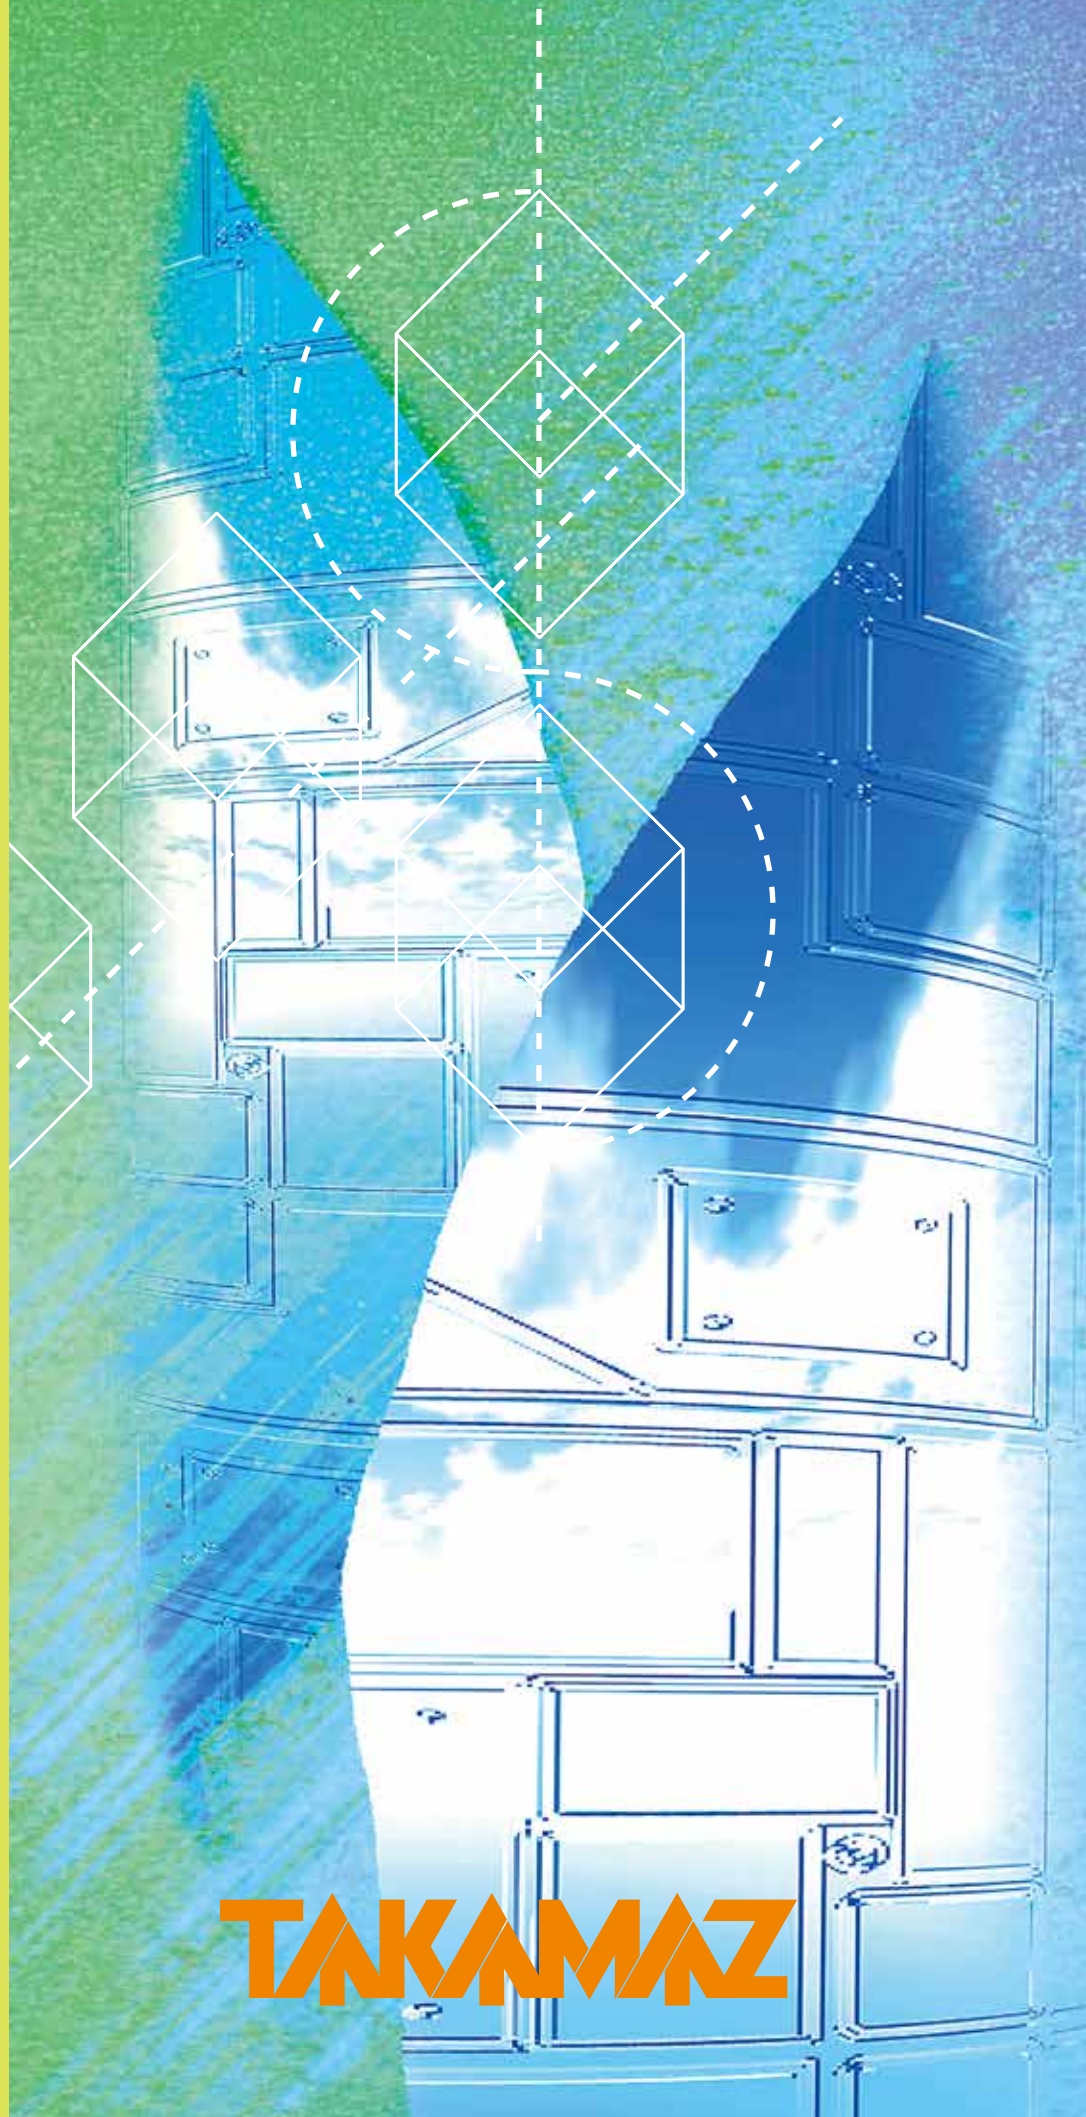

**TAKAMAZ**

Doubling productivity while halving the floorspace requirement **TAKAMAZ** has called on knowledge built up over many years as a pioneer in the field of automated part turning to come up with the most efficient machine configuration for "near net shape operation." The result is the XD series. The series represents a new concept premised on keeping the non-cutting time during turning operations (loading, idle time) to the absolute minimum. With a unique construction featuring two spindles and one slide, the series is set to be the world standard from now on.

# Double the productivity, half the footprint

## XD series

Precision lathe with two spindles and one slide





Loading at one spindle while operation is in progress at the other...

# XD-8 PLUS XD-8T PLUS

**Select either a Gang type or drum turret according to requirements!**

- Compact design with integral loader for high-efficiency operation.
- Eco-friendly specifications for a cleaner production environment.
- Either a gang type or 6-station turret can be selected depending on the requirements. ※Specification cannot be changed after delivery.



# XD-10i

**Workpieces one class bigger can now be machined!**

- High-speed servo turret substantially cuts idle time.
- Excellent access and fast, simple setup changes.
- Compact design with integral loader.
- Low total costs achieved by use of common parts.



The machine pictured is the standard color.

# XD-8 PLUS XD-8T PLUS



## Use of a gang type substantially reduces idle time

To answer the requirements imposed by severe operation time restrictions, the machine is equipped with a gang type that doesn't need to be indexed. The machine has also been given a simpler construction, which improves its rigidity and so allows more accurate machining.

※ The XD-8T PLUS is equipped with a 6-station drum-type turret.

### High turret rapid traverse rate

A maximum rapid traverse rate of 18m/min. has been achieved for both X- and Z-axis.

※ For the XD-8 PLUS, the Z-axis maximum rapid traverse rate is 24m/min.




Standard push-sleeve collet chuck



Power chuck (Option)

### XD-8 PLUS

Spindle power characteristic curve

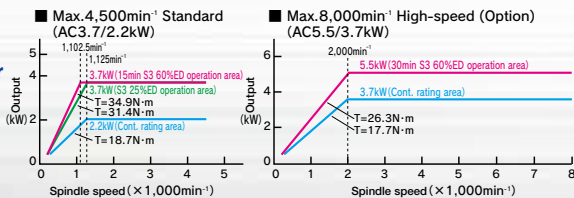

### Newly developed high-speed air-driven precision chucking system

To answer requirements for faster cutting, a highly rigid spindle construction with a  $\phi 65\text{mm}$  bearing internal bore and maximum speed of  $8,000\text{min}^{-1}$  (Option) is adopted.

In the standard specification, a push-sleeve collet chuck made by TAKAMAZ is fitted. However, chucks that have been used previously can also be used, or alternatively a 5-inch power chuck could be fitted.

## The next generation of machines has to

We believe that as a manufacturer we must develop machines that in addition to being "productive" also have the most limited effects on the environment. One example of our efforts is the high performance ball screws and linear guides with a self-lubricating function that are featured on the XD-8 PLUS. Apart from making the conventional daily oil check unnecessary, this function has the additional advantages that it stops lubricating oil contaminating and degrading coolant, substantially cuts the time required for maintenance, and keeps the working environment cleaner.

### Focusing on the environment


A machine like this goes through a great deal of spindle acceleration/deceleration and repeated turret motions in both directions, so the reverse electromotive force generated during motor deceleration is not consumed by conversion to heat as in previous machine models. Instead there is a power recycling system whereby the generated energy is circulated back to the power supply, giving durability in continuous operation, and energy savings.

### Integral tool holders for simple setup (XD-8 PLUS : gang type)

Integral tool holders have been adopted to improve rigidity, speed up setup changes, and save space. Due to the integral construction, chips are no longer trapped against the holder, and accidents that result from the trapping of chips are also prevented.

### External setup for increased speed

Coolant is dispensed directly to the cutting point from a discharge port at the top of the turret; the construction of this system ensures that the coolant is delivered only to the tip of the tool currently engaged in machining (patent pending). With a powerful discharge rate of up to 100 liters/minute, this system extends tool life and promotes more stable dimensional accuracy.

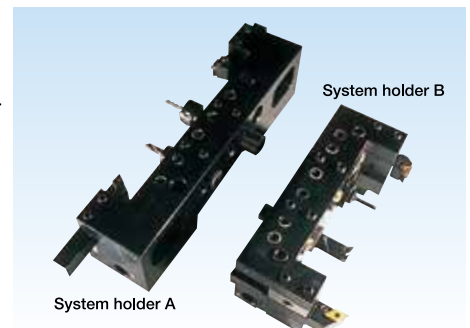

※ Holders can be used in conjunction at left and right.

# XD-10i


## Servo turret offering top class speed is adopted



The rigidity of the 10-station drum turret used on the machine has increased through a uniform, balanced design, making it capable of continuous full operation. The turret rotation speed of 0.2 seconds per index is one of the fastest available.

### XD-10i



Spindle power characteristic curve

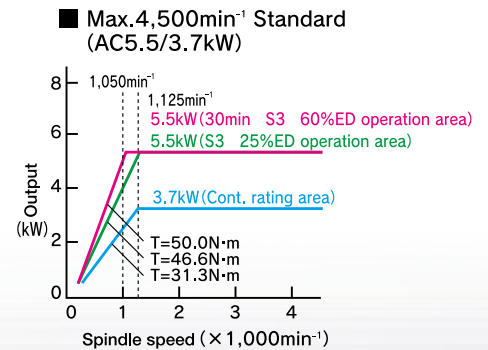

## consider people and the environment.

### Footprint of only 2.5m<sup>2</sup> (XD-8 PLUS)

These machines offer space savings of approximately 30% in comparison with conventional 2-spindle, 2-slide lathes, and in a line comprising two single lathes in sequence, this gives a dramatic space saving of 50%, so the operation rate per unit of floor space is greatly improved. (Comparisons are with other TAKAMAZ machines).

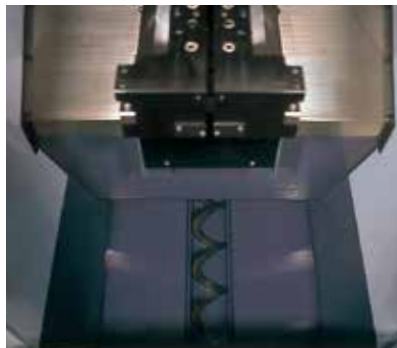

### Free chip flow eases the problems associated with chip disposal


The disposal of chips in the tooling space, which previously caused problems with gang type, is no problem at all with these machines. And the XD-10i (which has a drum turret) has a chip duct space immediately beneath the chuck and turret, and this in combination with a chip conveyor prevents the accumulation and entangling of chips.

### Excellent accessibility for working convenience

The door and shutter can be fully opened, making it very easy to work, and lightening the workload on the operator.



# SERVO LOADER

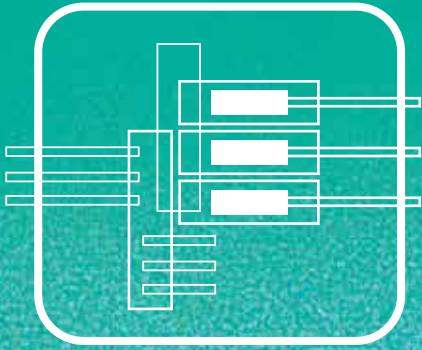

## MDH-50 ΣiD-80

### '0.00" "Zero loss time" servo loader



The loader has a high-speed loading time of 5 seconds per loading. The exceptional total balance that has been achieved by integrating the loader with the machine has led not only to high productivity but also a broad range of other benefits including space savings and joint maintenance during after service.

- ◆ Machine equipped with a dedicated controller that enables even a novice to complete setup reliably and simply.
- ◆ Switching to servomotor drive rather than the air cylinder drive normally used in loaders reduces running costs due to the smaller number of consumable parts.
- ◆ Since the loader is installed on the machine itself, no additional space is used (space savings).
- ◆ A new type of linear guide that does not require lubrication is used, cutting running costs because it is maintenance free.

### Excellent productivity

1-spindle 1-turret  
〈Single lathe〉  
\*Comparison is with other  
TAKAMAZ machines



2-spindle 1-slide  
〈XDseries〉



Intermediate turnover unit



Touch panel


	Units	MDH-50 XD-8PLUS	ΣiD-80 XD-10i
Number of controlled axes		2 axes × 2 units	
Maximum bearable diameter	mm	φ 50	φ 80
Maximum bearable length	mm	60	70
Maximum bearable mass (One side)	kg	0.5	1.0
Finger stroke (One side)	mm	10	16

		Units	MDH-50 XD-8PLUS	ΣiD-80 XD-10i
Traverse axis	Stroke	mm	500	850
	Rapid traverse rate	m/min	75	90
Vertical axis	Stroke	mm	540	500
	Rapid traverse rate	m/min	75	90
Conveyor length	IN	mm	800	1,200
	OUT	mm	600	800


### Loading variations

■ Transfer between spindles / turnover between spindles ■ Turret

#### MDH-50

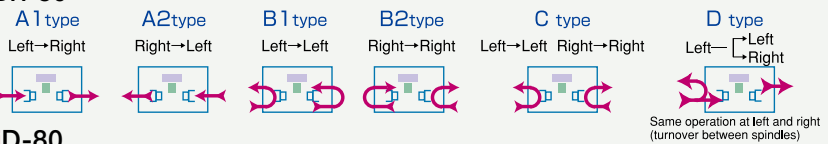

#### ΣiD-80

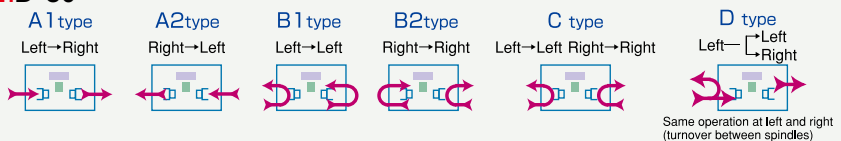

# OPTIONAL PARTS

## Quality / Environment control unit



● **External measurement**  
Dimensional error is fed back to the machine to maintain high-quality dimensional accuracy.



● **Oil mist collector**  
Collection of oil mist helps to keep the environment clean.



● **Automatic fire extinguisher**  
Automatically discharges a fire-extinguishing agent if fire breaks out in the machine during operation.

## Workpiece stocker / Conveyor unit



● **“Rakuchin” stocker**  
Reasonably priced and allows control of workpiece transport in bucket units.



● **Station stocker**  
Multi-level stocker that allows a flexible response to changes in workpiece diameter.



● **Parts feeder**  
This is a bucket type stocker suited to small workpieces that do not take up much space. The part feeder can be directly linked to a conveyor.

## Cutting efficiency / Chip processing



● **Chip conveyor (Spiral type)**  
Enables semi-automated chip disposal in the minimum space. A floor type conveyor is also available.




● **High-pressure coolant**  
This is a unit for discharging, at high pressure, coolant that is always cooled. It can extend tool life to a surprising extent.




● **Semi dry machining**  
Extremely small quantities of vegetable oil coolant with excellent lubricating properties are applied very locally to the tool tip for machining that is close to dry.

# STROKE & TURRET

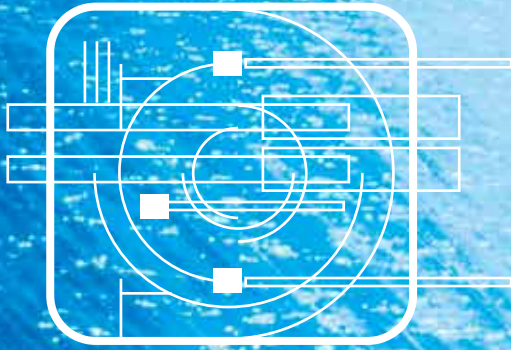


## XD-8 PLUS

Stroke-Related Drawing (Gang type)

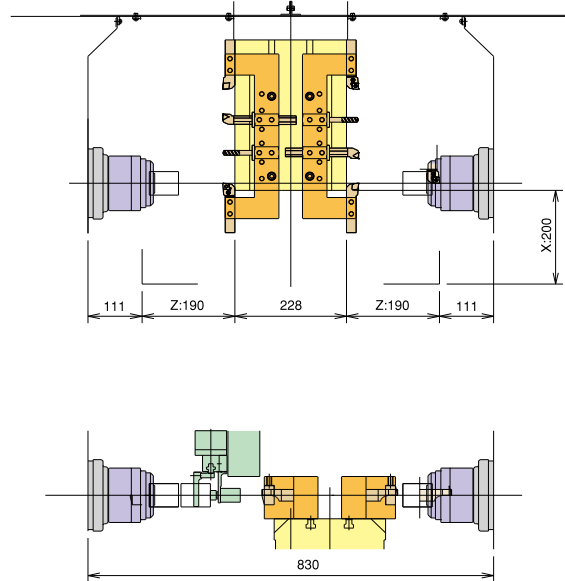

# TOOLING SYSTEM

## XD-8 PLUS

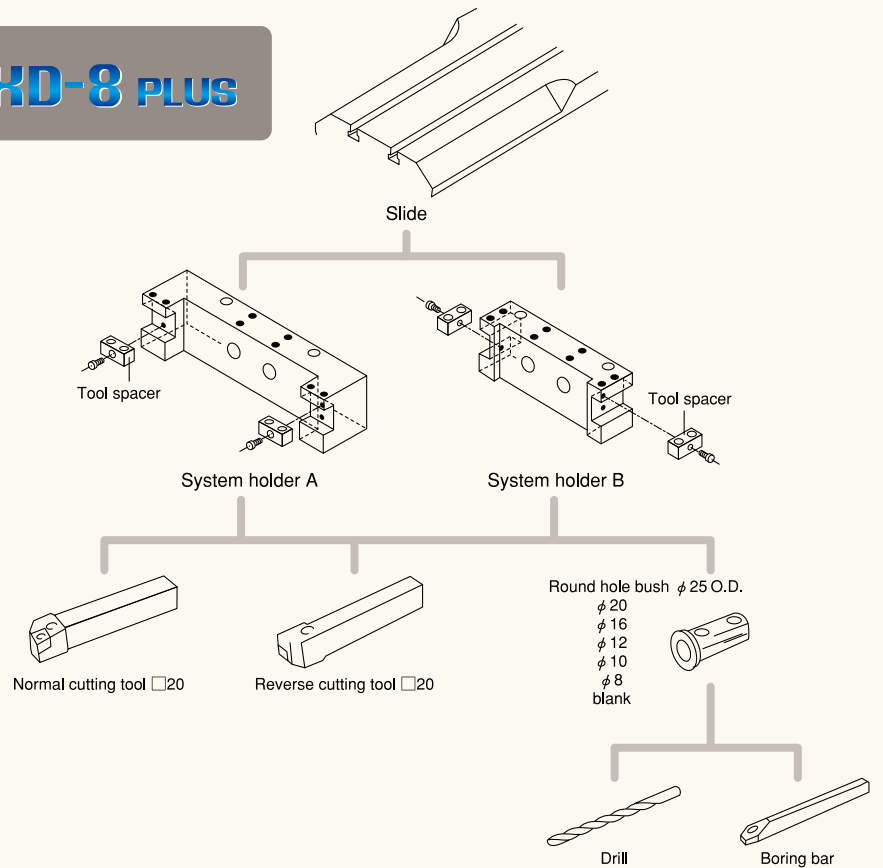


※ The holders at right and left are interchangeable.  
 ※ Tools can be adapted for use at the left or right by changing the tool spacer.




## XD-8T PLUS

### Stroke-Related Drawing

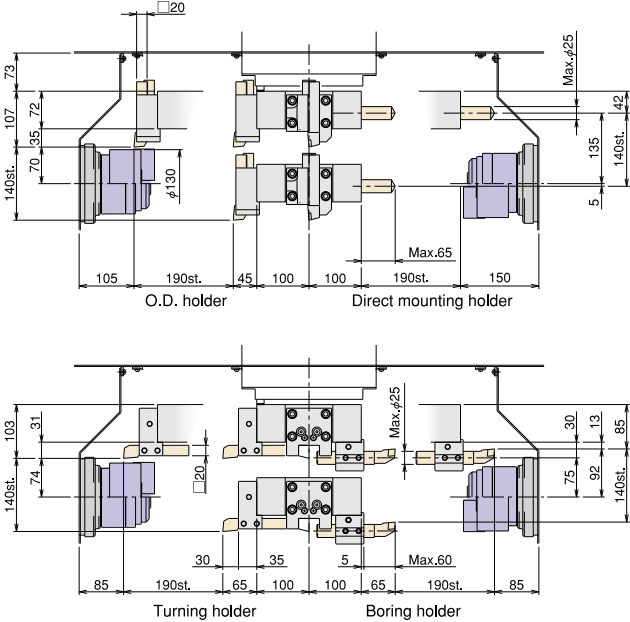


## XD-10i


### Stroke-Related Drawing

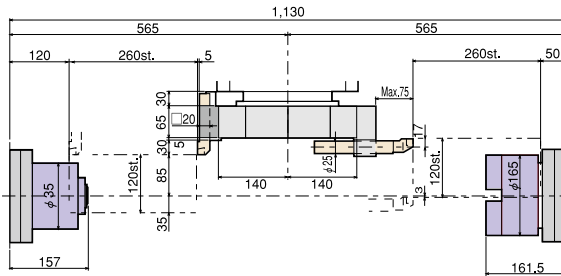


### Turret Interference

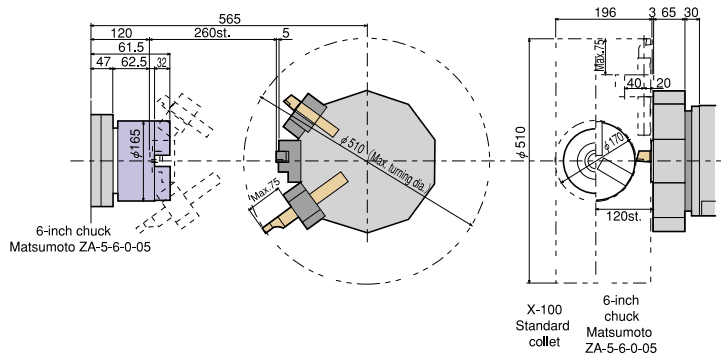


## XD-8T PLUS




6-station turret

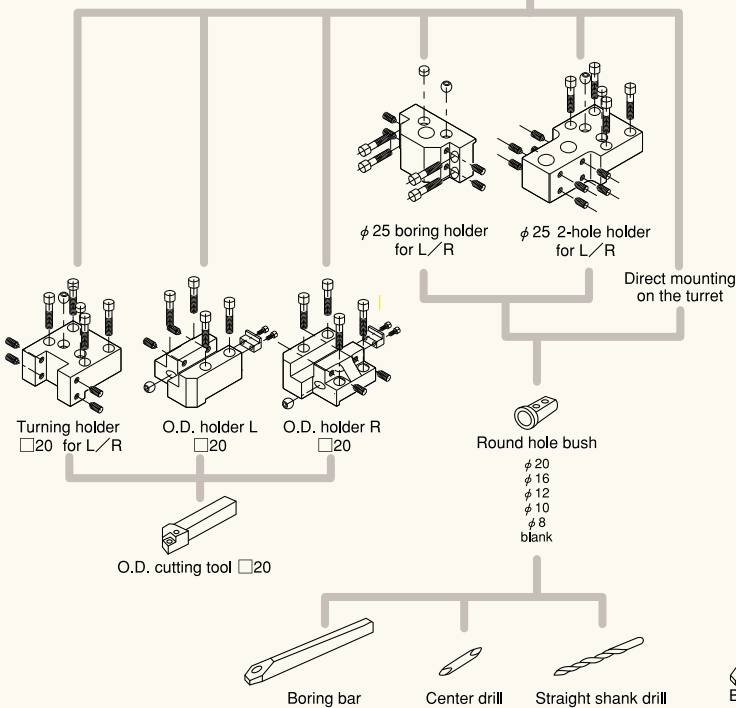

## XD-10i



10-station turret

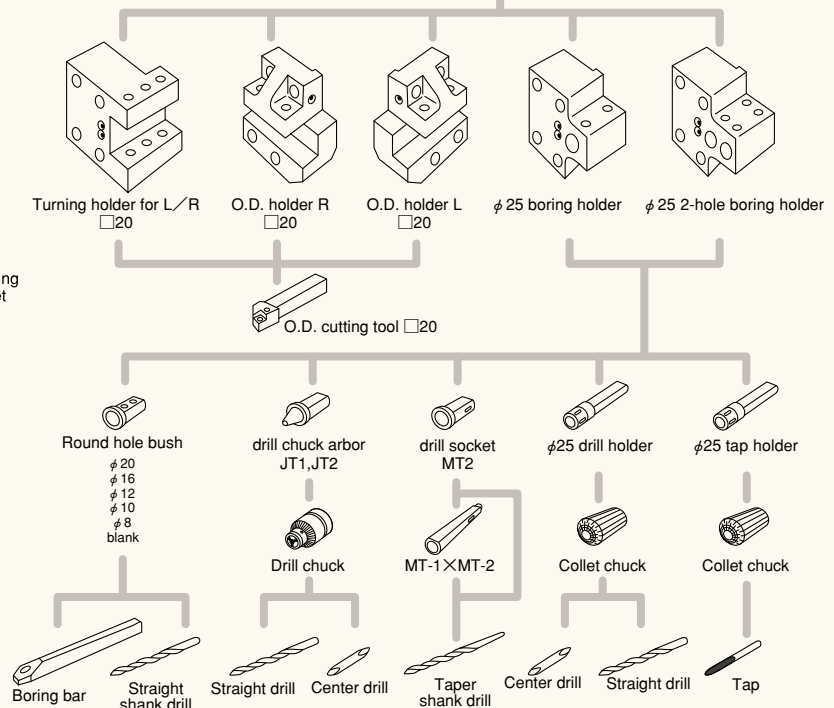

※Boring bars cannot be mounted directly in the turret.

## Machine Specifications

Item		Unit	XD-8 PLUS	XD-8T PLUS	XD-10i
Capacity	Optimum turning size	mm	φ50		φ80
	Max. turning length	mm	60		70
	Chuck size	inch	Collet, (5) × 2		Collet, (6) × 2
Spindle	Spindle nose	JIS	Flat type		A <sub>2</sub> - 5
	Spindle bearing I.D.	mm	φ65		φ75
	Spindle speed	min <sup>-1</sup>	Max.4,500 (8,000*)		Max.4,500 (6,000)
Tool post	Type		Gang type	6-station turret	10-station turret
	Tool shank	mm	□20		□20
	Boring holder I.D.	mm	φ25		φ25
	Max. stroke	mm	X:200 Z:380 (± 190) X:140	Z:380 (± 190)	X:120 Z:520
	Rapid traverse rate	m/min	X:18 Z:24		X:18 Z:24
Motors	Spindle motor	kW	AC3.7/2.2 (5.5/3.7*) × 2		AC5.5/3.7 (7.5/5.5) × 2
	Feed motor	kW	X:AC1.0 Z:AC1.0		X:AC1.4 Z:AC1.6
	Coolant motor	kW	AC0.39 × 2		AC0.25 × 2
	Hydraulic motor	kW	(AC0.75)	AC0.75	AC1.5
Size	Spindle center height	mm	1,100		965
	L × W × H	mm	1,580 × 1,550 × 1,935		2,310 × 1,695 × 1,950
	Machine weight	kg	3,200	3,300	4,100
Total electric capacity		KVA	18 (24:AC5.5/3.7)	20 (25:AC5.5/3.7)	28 (33:AC7.5/5.5)

\* For the 8,000 min<sup>-1</sup> spindle, a spindle motor of AC5.5/3.7kW is mounted.

( ):Option

## Standard Accessories

Item	XD-8 PLUS	XD-8T PLUS	XD-10i
<input type="checkbox"/> System holder A	2 sets	—	—
<input type="checkbox"/> Boring holder	—	Option	2 sets
<input type="checkbox"/> O.D. holder	—	2 sets	4 sets
<input type="checkbox"/> TAKAMAZ collet chuck	1 set		
<input type="checkbox"/> Collet flange	2 sets (Push-sleeve)	—	2 sets
<input type="checkbox"/> Hydraulic unit	Option	1 set	
<input type="checkbox"/> Chucking cylinder	Air	Hydraulic	

Item	XD-8 PLUS	XD-8T PLUS	XD-10i
<input type="checkbox"/> TAKAMAZ loader system	1 unit (2 sets)		
<input type="checkbox"/> Auto shutter	1 set		
<input type="checkbox"/> Coolant unit	1 set (120 lit.)	—	1 set (190 lit.)
<input type="checkbox"/> Signal light (1-tier/2-tier/3-tier)	3-tier		Option
<input type="checkbox"/> Service tool kit	1 set		
<input type="checkbox"/> TAKAMAZ instruction manual	1 set		

## Optional Accessories

Item	XD-8 PLUS	XD-8T PLUS	XD-10i
<input type="checkbox"/> System holder B	○	—	—
<input type="checkbox"/> Collet chucks	—	○	—
<input type="checkbox"/> TAKAMAZ collet system	—	○	—
850 collet flange	—	○	—
Oversize collet	—	○	—
2A collet flange	—	—	○
<input type="checkbox"/> Hydraulic chucks	—	○	—
<input type="checkbox"/> Chucking cylinder	—	○*1	○
<input type="checkbox"/> Hydraulic unit	○*1	—	(Standard)
<input type="checkbox"/> Power chucks	—	Air / Hydraulic	Hydraulic
<input type="checkbox"/> Work set detector	—	○	—
<input type="checkbox"/> Spindle indexing device	—	Electrical / Mechanical	—
<input type="checkbox"/> Thread cutting unit (Including constant surface speed control)	(Standard)	—	○
<input type="checkbox"/> Rear chip conveyor (Floor type / Spiral type)	—	○*2	○
<input type="checkbox"/> Front air blower	(Standard)	—	○
<input type="checkbox"/> Rear air blower	—	○	—
<input type="checkbox"/> Rear coolant unit	—	○	—
<input type="checkbox"/> Signal light (1-tier/2-tier/3-tier)	(Standard:3-tier)	—	○
<input type="checkbox"/> Automatic fire extinguisher	—	○	—
<input type="checkbox"/> Automatic power shut-off device	—	○	—
<input type="checkbox"/> Special color	—	○	—
<input type="checkbox"/> Others	—	※3	—

\* 1 For the 8,000min<sup>-1</sup> spindle, some chucks and cylinders may not be used. Consult our sales representative.


\* 2 The standard is a spiral type.

\* 3 If you have any request, please consult our sales representative.

## Controller Specifications


Item	XD-8 PLUS	XD-8T PLUS	XD-10i
	TAKAMAZ & FANUC Oi-TD		
Controlled axes	2 axes (X,Z)		
Simultaneously controllable axes	Simultaneous 2 axes × 2		
Least input increment	0.001mm (X in diameter)		
Least command increment	X:0.0005mm Z:0.001mm		
Auxiliary function	M-code 3 digit		
Spindle function	S-code 4 digit		
Tool function	T-code 2 digit	T-code 4 digit	
Tape code	EIA (RS232C) / ISO (840) automatic recognition		
Cutting feedrate	1 ~ 5,000mm/min		
Command system	Incremental / Absolute		
Linear interpolation	G01		
Circular interpolation	G02,G03		
Cutting feedrate override	0 ~ 150%		
Rapid traverse override	F0,100%		
Program number	4 digit		
Backlash compensation	0 ~ 9999μm		
Program memory capacity	512Kbyte (1,280m)		
Tool offsets	64 sets		
Registered programs	400 pcs.		
Tool geometry / Wear offset	Standard		
Canned cycle	G90,G92,G94		
Radius designation on arc	Standard		
Tool offset measurement input	Standard		
Background editing	Standard		
Direct drawing dimension programming	Standard		
Custom macro	Standard		
Additional custom macro common variables	#100 ~ #199, #500 ~ #999		
Pattern data input	Standard		
Nose R compensation	G40,G41,G42		
Inch / Metric conversion	G20 / G21		
Programmable data input	G10		
Run hour / Parts count display	Standard		
Extended part program editing	Standard		
Multiple repetitive cycle	G70 ~ G76		
Multiple repetitive cycle II	Pocket-shaped		
Canned drilling cycle	Standard		
Chamfering / Corner R	(Option)		
Constant surface speed control	Included in the thread cutting unit G96,G97		Option
Continuous thread cutting	Included in the thread cutting unit G32		Option
Variable lead thread cutting	Included in the thread cutting unit G34		Option
Thread cutting retract	Included in the thread cutting unit		Option
Clock function	Standard		
Help function	Standard		
Alarm history display	50 pcs.		
Self-diagnosis function	Standard		
Sub-program call	Up to 10 loops		
Decimal point input	Standard		
2nd reference point return	G30		
Work coordinate system setting	G50,G54 ~ G59		
Stored stroke check 1	Standard		
Stored stroke check 2,3	Standard		
Input / Output interface	R232C, USB Flash Memory, Memory card, Ethernet*		
Alarm message	Standard		
Graphic display	Standard		
Spindle orientation	(Option)		
Dynamic graphic display	(Option)		
Tool life management	(Option)		
Multiple M codes in one block	(Max.3:Option)		
Conversational programming with graphic function	Standard		
Abnormal load detection	Standard		
Automatic data backup	Max.3		
Automatic screen deletion function	Standard		
TAKAMAZ management support function	(Work / Tool counter, Tool load monitor, Other: Option)		—
TAKAMAZ maintenance functions	Standard		

\* USB Flash Memory is not standard for CE Specifications.




## XD-8 PLUS


( ) :XD-8T PLUS

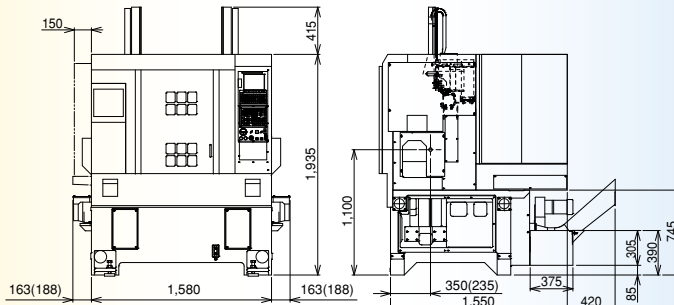

※The XD-8T PLUS model uses a free-standing type hydraulic unit.

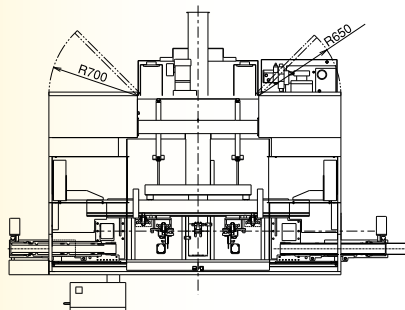

## XD-10i

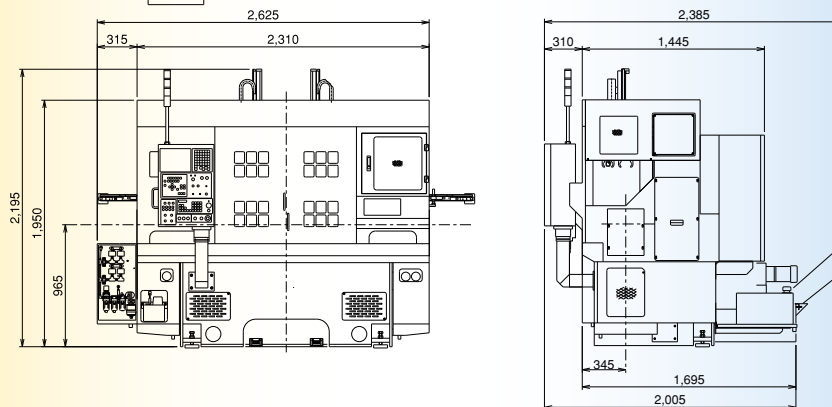

Units (mm)

# XD series

# TAKAMAZ

## TAKAMATSU MACHINERY CO.,LTD.

■HEAD OFFICE & PLANT  
1-8 ASAHIGAOKA HAKUSAN-CITY ISHIKAWA JAPAN. 924-8558 TEL +81-(0)76-274-1403 FAX +81-(0)76-274-8530

## TAKAMATSU MACHINERY USA INC.

■CHICAGO HEAD OFFICE  
1280 LANDMEIER ROAD ELK GROVE VILLAGE, IL 60007 USA TEL +1-(0)847-981-8577 FAX +1-(0)847-981-8599  
■CINCINNATI OFFICE  
5233 MUHLHAUSER ROAD, WEST CHESTER TOWNSHIP, OH 45011 USA TEL +1-(0)513-870-9777 FAX +1-(0)513-870-0325  
■GREENVILLE OFFICE  
506 MATRIX PARKWAY PIEDMONT, SC 29673 USA TEL +1-(0)847-981-8577

## TAKAMAZ MACHINERY EUROPE GmbH

INDUSTRIEGEBIET, DIEPENBROICH 27 D-51491 OVERATH, GERMANY  
TEL +49-(0)2206-866-150 FAX +49-(0)2206-865-123

## TAKAMAZ MACHINERY (HANGZHOU) CO.,LTD.

■HANGZHOU HEAD OFFICE  
NO.6800, JIANGDONG 3RD ROAD, JIANGDONG INDUSTRIAL PARK, XIAOSHAN, HANGZHOU, ZHEJIANG, CHINA  
TEL +86-(0)571-8287-9709 FAX +86-(0)571-8215-3732  
■GUANGZHOU OFFICE  
ROOM 1316, NO.2, KEHUI FOURTH STREET, NO.99 OF SCIENCE ROAD, LUOGANG DISTRICT, GUANGZHOU  
TEL +86-(0)20-8210-9921 FAX +86-(0)20-8210-9921

## TAKAMATSU MACHINERY (THAILAND) CO.,LTD.

■BANGKOK HEAD OFFICE  
888/59 MOO 9, TAMBOL BANGPLA, AMPHUR BANGPLEE, SAMUTPRAKARN PROVINCE, THAILAND  
TEL +66-(0)2-136-7831 FAX +66-(0)2-136-7834  
■EASTERN SEABOARD BRANCH  
848/14 MOO 3, TAMBOL BO WIN, AMPHUR SIRACHA, CHONBURI 20230  
TEL +66-(0)38-182-509 FAX +66-(0)38-182-510

www.takamaz.co.jp

## TP MACHINE PARTS CO.,LTD.

128/345 MOO 1 THEPARAK ROAD, BANGSAOTHONG SUBDISTRICT, BANGSAOTHONG DISTRICT, SAMUTPRAKARN  
TEL +66-(0)2-706-3820 FAX +66-(0)2-706-3822

## PT.TAKAMAZ INDONESIA

JL. FESTIVAL BOULEVARD BLOK AA 11 NO.30.31 GRAND WISATA TAMBUN, BEKASI 17510  
TEL +62-(0)21-8261-6431 FAX +62-(0)21-8261-6430

## TAKAMAZ MACHINERY MEXICO,S.A.DE C.V.

AVENIDA DE LOS INDUSTRIALES 522, LOCAL 4, INDUSTRIAL JULIAN DE OBREGON, 37290 LEON, GUANAJUATO MEXICO  
TEL +52-477-784-0468

## TAKAMATSU MACHINERY VIETNAM CO.,LTD.

NO.25, NGUYEN LUONG BANG, TAN PHU WARD, DISTRICT 7, HO CHI MINH CITY, VIETNAM  
TEL +84-(0)28-5417-3917 FAX +84-(0)28-5417-3919

### Precautions Related to Foreign Exchange and Foreign Trade Control Laws

This product (machine and ancillary equipment) may fall under the category of controlled goods by the foreign exchange and foreign trade control laws.

As such, the exportation must be authorized by the Japanese government as stipulated in the laws

This product is manufactured in accordance with the regulations and standards that prevail in the country or region of destination.

The user must not export, sell, or relocate the product, to any country with different regulations or standards.



This brochure is made from 80% recycled paper.